

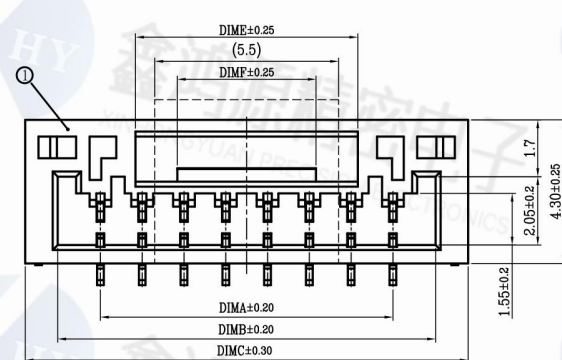

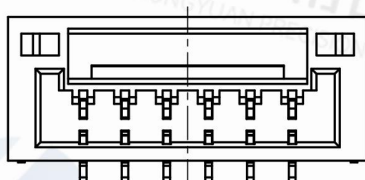



SECTION A-A

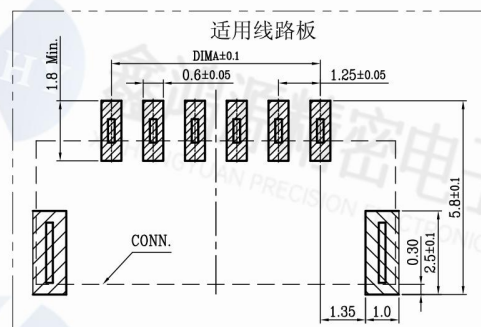


WITH COVER

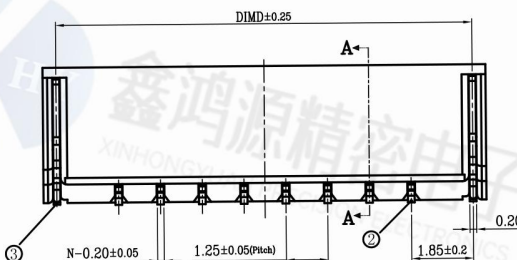

2~6 Pin

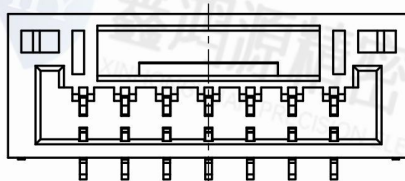

7 Pin

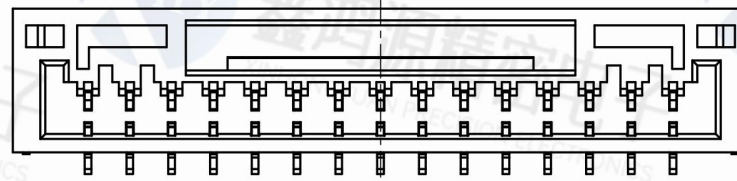

14~16 Pin

序号	品名	材质
①	1.25- H型卧式WTB胶芯	PA6T UL94V-0 米黄色
②	1.25- H型立式WTB端子	铜合金/表面镀锡
③	1.25- H型卧式WTB焊片	铜合金/表面镀锡
④	1.25- H型立式WTB吸盖	LCP UL94V-0 自然色

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 50V AC, DC.
4. 耐电压: 500V AC/minute.
5. 接触电阻: $\leq 0.02\Omega$.
6. 绝缘电阻: $\geq 100\text{M}\Omega$.
7. 额定电流: 1A AC, DC.
8. 产品料号:

CKT	A	B	C	D	E	F
2	1.25	3.80	5.75	4.95	2.15	0.75
3	2.50	5.05	7.00	6.20	3.40	2.00
4	3.75	6.30	8.25	7.45	4.65	3.25
5	5.00	7.55	9.50	8.70	5.90	4.50
6	6.25	8.80	10.75	9.95	7.15	5.75
7	7.50	10.05	12.00	11.20	6.65	4.15
8	8.75	11.30	13.25	12.45	6.65	4.15
9	10.00	12.55	14.50	13.70	7.90	5.40
10	11.25	13.80	15.75	14.95	9.15	6.65
11	12.50	15.05	17.00	16.20	10.40	7.90
12	13.75	16.30	18.25	17.45	11.65	9.15
13	15.00	17.55	19.50	18.70	12.90	10.40
14	16.25	18.80	20.75	19.95	11.65	9.15
15	17.50	20.05	22.00	21.20	11.65	9.15
16	18.75	21.30	23.25	22.45	11.65	9.15

Xihoy 深圳市鑫鸿源精密电子有限公司

Shenzhen Xinhongyuan Precision Electronics Co., Ltd.

财富热线电话: 13670232690

工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	GH1. 25-LT-XA			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY MR. ZHANG	DATE: 2016. 06. 08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
				3	TERMINAL	PHOSPHOR BRONZE		POSITIONS			ANG	TOL	DMI	TOL
PART NAME	1. 25 Pitch H型立式WTB			2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY MR. WANG	SCALE 1/1	. X	± 3.0°	. X	± 0.2
ANGLE PROJECTION		UNIT	mm	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0			. XX	± 2.0°	. XX	± 0.1
		SCALE	1 : 1	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY MISS. LU	UNIT MM	. XXX	± 1.0°	. XXX	± 0.05