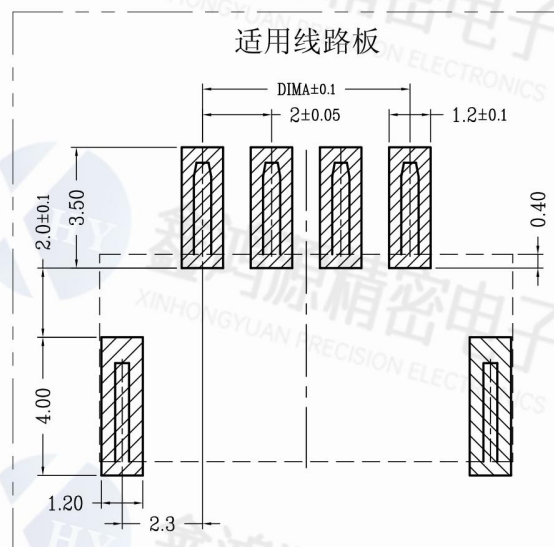
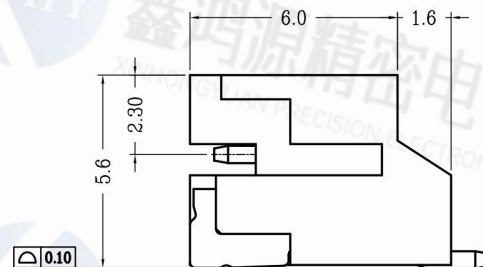


CKT	DIM A	DIM B	DIM C
2	2.00	4.80	7.95
3	4.00	6.80	9.95
4	6.00	8.80	11.95
5	8.00	10.80	13.95
6	10.00	12.80	15.95
7	12.00	14.80	17.95
8	14.00	16.80	19.95
9	16.00	18.80	21.95
10	18.00	20.80	23.95
11	20.00	22.80	25.95
12	22.00	24.80	27.95
13	24.00	26.80	29.95
14	26.00	28.80	31.95
15	28.00	30.80	33.95
16	30.00	32.80	35.95
17	32.00	34.80	37.95
18	34.00	36.80	39.95
19	36.00	38.80	41.95
20	38.00	40.80	43.95

序号	品名	材质
①	2.00 F型卧式WTB胶芯	LCP UL94V-0 本
②	2.00 F型卧式WTB端子	黄铜/表面镀锡
③	2.00 F型卧式WTB焊片	黄铜/表面镀锡

一般公差 (TOLERANCE)

X. $\pm .50$	XX $\pm .10$
X $\pm .20$	XXX $\pm .05$
ANGLES	$\pm 1^\circ$

 **深圳市鑫鸿源精密电子有限公司**
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话： 13670232690
工厂地址：深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	PH2.0-WT-XA			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE: 2016. 06. 08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
				3	TERMINAL	PHOSPHOR BRONZE		POSITIONS				ANG	TOL	DMI	TOL
PART NAME	2.00 Pitch F型卧式WTB业务图			2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE 1/1	. X	± 3. 0°	. X	± 0. 20
				1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0				. XX	± 2. 0°	. XX	± 0. 10
ANGLE PROJECTION		UNIT		mm					APP. BY	MISS. LU	UNIT MM	. XXX	± 1. 0°	. XXX	± 0. 05
		SCALE		1 : 1		NO.	COMPONENTS	MATERIALS				FINISH/COLOR SPECIFICATION	QUANTITY		