

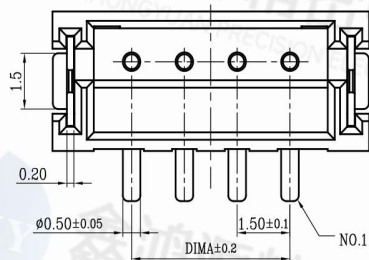

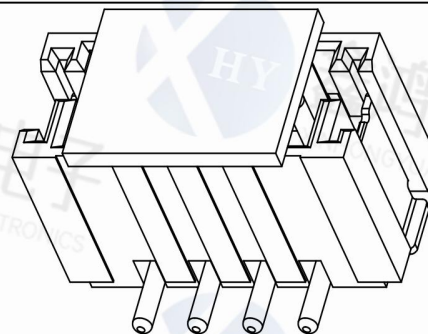


With Cover

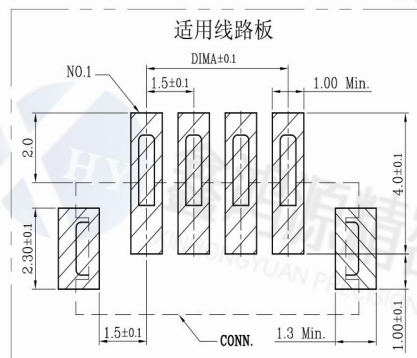

序号	品名	材质
①	1.5- L型立式WTB胶芯	LCP UL94V-0 自然色
②	1.5- L型立式WTB端子	铜合金/表面镀锡
③	1.5- L型立式WTB焊片	铜合金/表面镀锡
④	1.5- L型立式WTB吸盖	LCP UL94V-0 自然色

CKT	DIM A	DIM B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50
16	22.50	27.00
17	24.00	28.50
18	25.50	30.00
19	27.00	31.50
20	28.50	33.00

技术指标:

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ 。
- 额定电压: 100V, AC/DC。
- 接触电阻: $\leq 0.02\Omega$ 。
- 绝缘电阻: $\geq 500\text{M}\Omega$ 。
- 额定电流: 1A, AC/DC。

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	ZH1.5-WT-XA			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY MR. ZHANG	DATE: 2016. 06. 08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME	1.50 Pitch L型立式WTB			3	TERMINAL	PHOSPHOR BRONZE		POSITIONS			ANG	TOL	DMI	TOL
ANGLE PROJECTION		UNIT	mm	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY MR. WANG	SCALE 1/1	. X	± 3.0°	. X	± 0.20
		SCALE	1:1	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0			. XX	± 2.0°	. XX	± 0.10
				NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY MISS. LU	UNIT MM	. XXX	± 1.0°	. XXX	± 0.05