
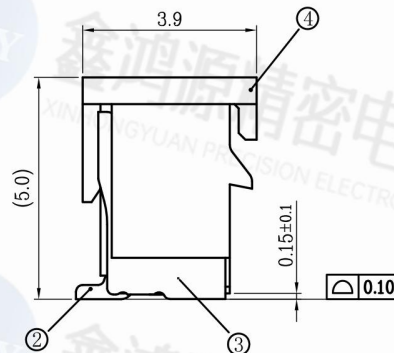
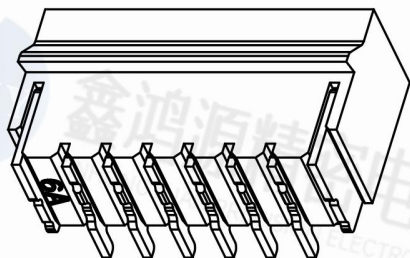
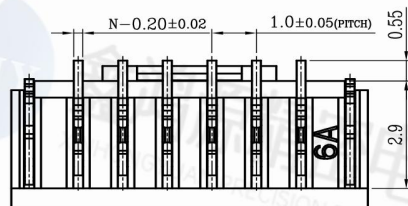
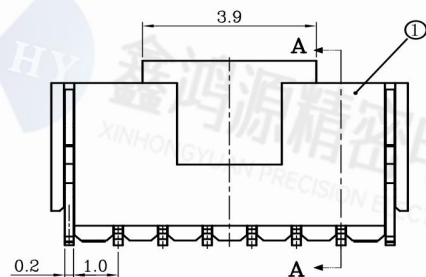
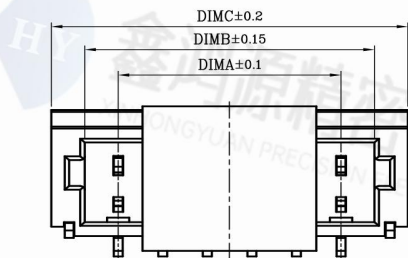


SECTION A-A

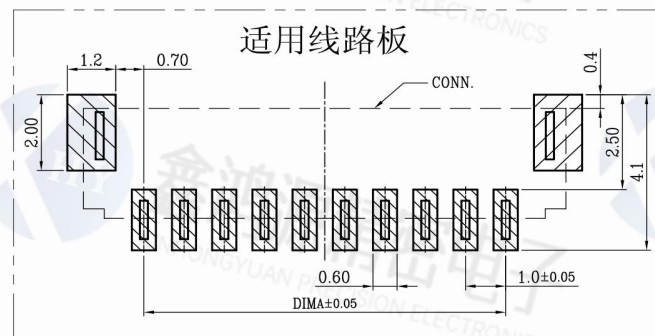

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC/DC。
4. 接触电阻: $\leq 0.02\Omega$ 。
5. 绝缘电阻: $\geq 100\text{M}\Omega$ 。
6. 额定电流:

适用电线型号: a. AWG#28: 1.0A(per pin)
b. AWG#30: 1.0A(per pin)
c. AWG#32: 0.8A(per pin)

CKT	DIM A	DIM B	DIM C
2	1.00	2.50	4.00
3	2.00	3.50	5.00
4	3.00	4.50	6.00
5	4.00	5.50	7.00
6	5.00	6.50	8.00
7	6.00	7.50	9.00
8	7.00	8.50	10.00
9	8.00	9.50	11.00
10	9.00	10.50	12.00
11	10.00	11.50	13.00
12	11.00	12.50	14.00
13	12.00	13.50	15.00
14	13.00	14.50	16.00
15	14.00	15.50	17.00
16	15.00	16.50	18.00
17	16.00	17.50	19.00
18	17.00	18.50	20.00
19	18.00	19.50	21.00
20	19.00	20.50	22.00
22	21.00	22.50	24.00
24	23.00	24.50	26.00
26	25.00	26.50	28.00

序号	品名	材质
①	1.0° E型除式带扣WTB 胶芯	LCP UL94V-0 自然色
②	1.0° E型立式WTB端子	铜合金/表面镀锡
③	1.0° E型除式WTB焊片	铜合金/表面镀锡
④	1.0° E型立式吸盖	LCP UL94V-0 自然色

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	SH1.0-LTK-XA			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE				
PART NAME	1.00 Pitch E型立式带扣WTB			3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL	
ANGLE PROJECTION		UNIT		mm	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	. X	± 3.0°	. X	± 0.20
		SCALE		1 : 1	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0	APP. BY	MISS. LU	UNIT	MM	. XX	± 2.0°	. XX	± 0.10
					NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY								