
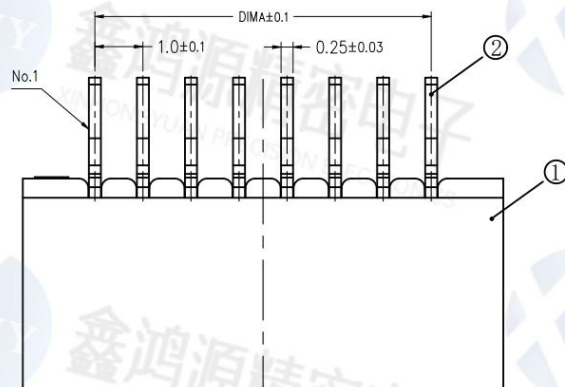

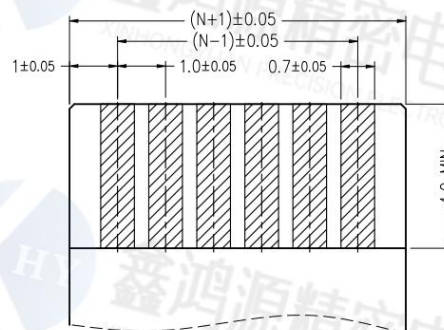
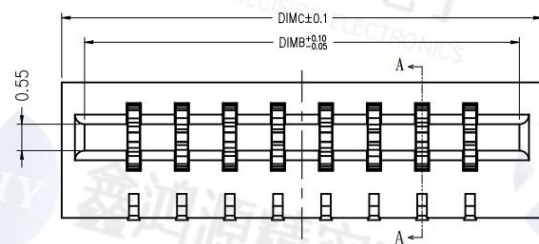


SECTION A-A

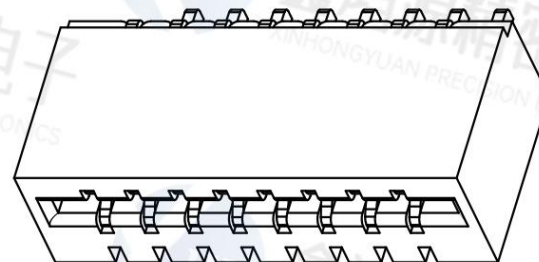

CKT	DIM A	DIM B	DIM C
4	3.0	5.05	6.00
5	4.0	6.05	7.00
6	5.0	7.05	8.00
7	6.0	8.05	9.00
8	7.0	9.05	10.00
9	8.0	10.05	11.00
10	9.0	11.05	12.00
11	10.0	12.05	13.00
12	11.0	13.05	14.00
13	12.0	14.05	15.00
14	13.0	15.05	16.00
15	14.0	16.05	17.00
16	15.0	17.05	18.00
17	16.0	18.05	19.00
18	17.0	19.05	20.00
19	18.0	20.05	21.00
20	19.0	21.05	22.00
21	20.0	22.05	23.00
22	21.0	23.05	24.00
23	22.0	24.05	25.00
24	23.0	25.05	26.00
25	24.0	26.05	27.00
26	25.0	27.05	28.00
27	26.0	28.05	29.00
28	27.0	29.05	30.00
29	28.0	30.05	31.00
30	29.0	31.05	32.00

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC(per pin)/DC等效。
4. 额定电流: 0.5A。
5. 接触电阻: $\leq 30\text{m}\Omega$ 。
6. 绝缘电阻: $\geq 500\text{M}\Omega$ 。
7. 耐压: 500V, AC/minute。
8. 产品料号:

WT1030-***-***

NO OF CKT (产品PIN数)


流水码

Plating(电镀方式)

- 0: 端子全雾锡
3: 端子全亮锡

Packing(包装方式)

- T: TUBE管装
R: TAPE & REEL卷装

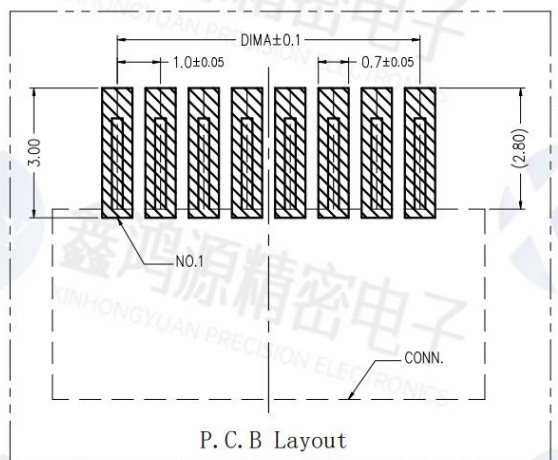

P. C. B Layout

Xihoy 深圳市鑫鸿源精密电子有限公司

Shenzhen Xinhongyuan Precision Electronics Co., Ltd.

财富热线电话: 13670232690

工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO		WT1030-****-***		4	STATOR	PHOSPHOR BRONZE		0	DAR. BY MR. ZHANG		DATE: 2016.06.08		UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME		FPC1.0 PITCH卧式无盖黑色双面接H3.0		3	TERMINAL	PHOSPHOR BRONZE		POSITIONS	CHK. BY MR. WANG		SCALE 1/1		ANG	TOL	DMI	TOL
ANGLE PROJECTION		UNIT		2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	APP. BY MISS. LU		UNIT MM		.X	± 3.0°	.X	± 0.20
		mm		1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0					.XX	± 2.0°	.XX	± 0.10
		SCALE		NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY					.XXX	± 1.0°	.XXX	± 0.05
		1:1														