


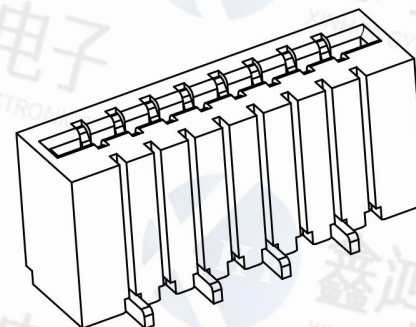
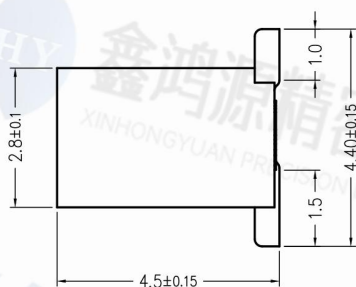





版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2019/03/27	①	1.0无盖卧式胶芯 (H=2.9)	LCP UL94V-0 黑
1	料号更新	2024/12/11		②	1.0无盖立式端子 (H=4.5)

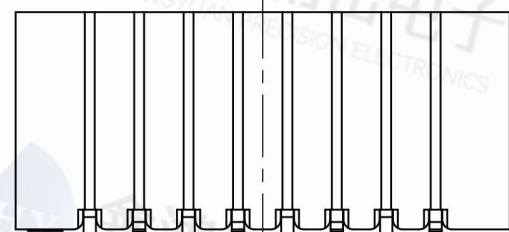

SECTION A-A

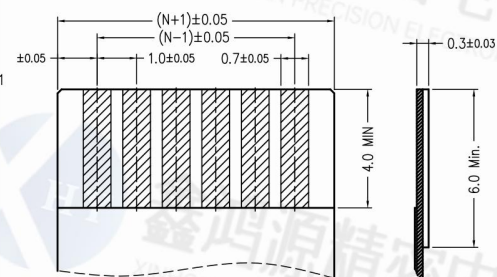

Applicable Flat Cable

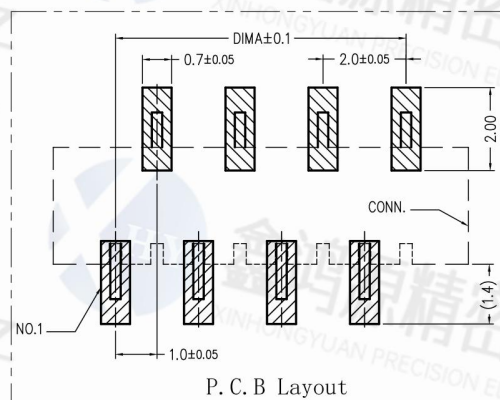

P.C.B Layout

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围： $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$ 。
3. 额定电压：50V, AC(per pin)/DC等效。
4. 额定电流：0.5A。
5. 接触电阻： $\leq 30\text{m}\Omega$ 。
6. 绝缘电阻： $\geq 500\text{M}\Omega$ 。
7. 耐压：500V, AC/minute。
8. 产品料号：

LT1030—** * *—***

NO OF CKT (产品PIN数) ———— 流水码

Plating(电镀方式)

0:端子全雾锡
3:端子全亮锡

一 Packing(包装方式)

T: TUBE管装

R: TAPE & R

R:TAPE & REEL卷装

CKT	DIM A	DIM B	DIM C
4	3.0	5.05	6.00
5	4.0	6.05	7.00
6	5.0	7.05	8.00
7	6.0	8.05	9.00
8	7.0	9.05	10.00
9	8.0	10.05	11.00
10	9.0	11.05	12.00
11	10.0	12.05	13.00
12	11.0	13.05	14.00
13	12.0	14.05	15.00
14	13.0	15.05	16.00
15	14.0	16.05	17.00
16	15.0	17.05	18.00
17	16.0	18.05	19.00
18	17.0	19.05	20.00
19	18.0	20.05	21.00
20	19.0	21.05	22.00
21	20.0	22.05	23.00
22	21.0	23.05	24.00
23	22.0	24.05	25.00
24	23.0	25.05	26.00
25	24.0	26.05	27.00
26	25.0	27.05	28.00
27	26.0	28.05	29.00
28	27.0	29.05	30.00
29	28.0	30.05	31.00
30	29.0	31.05	32.00

Xihoy 深圳市鑫鸿源精密电子有限公司

Shenzhen Xinhongyuan Precision Electronics Co., Ltd.

财富热线电话: 13670232690

工厂地址：深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	LT1030-** ***-***			4	STATOR	PHOSPHOR BRONZE		2	DAR. BY MR. ZHANG	DATE: 2016. 06. 08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
				3	TERMINAL	PHOSPHOR BRONZE		POSITIONS			ANG	TOL	DMI	TOL
PART NAME	FPC 1.0 PITCH立式无锁黑色双面接			2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY MR. WANG	SCALE 1/1	. X	± 3.0"	. X	± 0.2
ANGLE PROJECTION		UNIT	mm	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	1			. XX	± 2.0"	. XX	± 0.1
		SCALE	1:1	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY MISS. LU	UNIT MM	. XXX	± 1.0"	. XXX	± 0.0