
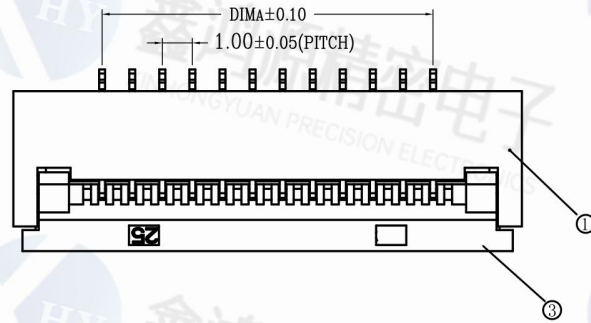


SECTION A-A

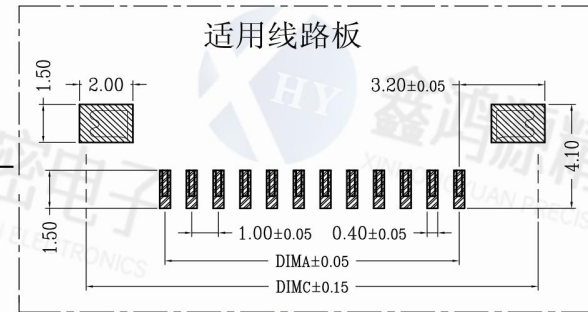

技术指标:

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 温度范围: -25° C~85° C.
- 额定电压: 50V, AC/DC(等效).
- 接触电阻: $\leq 0.03\Omega$.
- 绝缘电阻: $\geq 500M\Omega$
- 产品料号:

XW10202-**-**-**
NO OF CKT (产品PIN数) 00 后盖有LOGO;
01 后盖无LOGO
Plating (电镀方式) Packing (包装方式)
0: 端子全雾锡 T: TUBE管装
1: 端子全金 (G/F OVERALL) R: TAPE & REEL卷装
5: 端子半金锡

一般公差 (TOLERANCE)

X ±.50 XX ±.10
X ±.20 XXX ±.05
ANGLES ±1°

版次	变更摘要	日期
1	增加料号说明	2015/1/28

序号	品名	材质
①	0.5掀盖胶芯 (H2.0)	LCP UL94V-0 本色
②	0.5掀盖端子 (H2.0)	磷青铜/表面镀锡
③	0.5掀盖后盖 (H2.0)	LCP UL94V-0 黑色
④	0.5掀盖焊片 (H2.0)	黄铜/表面镀锡

CKT	DIMA	DIMB	DIMC
4	3.00	5.10	8.90
5	4.00	6.10	9.90
6	5.00	7.10	10.90
7	6.00	8.10	11.90
8	7.00	9.10	12.90
9	8.00	10.10	13.90
10	9.00	11.10	14.90
11	10.00	12.10	15.90
12	11.00	13.10	16.90
13	12.00	14.10	17.90
14	13.00	15.10	18.90
15	14.00	16.10	19.90
16	15.00	17.10	20.90
17	16.00	18.10	21.90
18	17.00	19.10	22.90
19	18.00	20.10	23.90
20	19.00	21.10	24.90
21	20.00	22.10	25.90
22	21.00	23.10	26.90
23	22.00	24.10	27.90
24	23.00	25.10	28.90
25	24.00	26.10	29.90
26	25.00	27.10	30.90
27	26.00	28.10	31.90
28	27.00	29.10	32.90
29	28.00	30.10	33.90
30	29.00	31.10	34.90

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME	3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL
ANGLE PROJECTION	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	. X	± 3.0°	. X	± 0.20
UNIT	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0					. XX	± 2.0°	. XX	± 0.10
SCALE	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY	MISS. LU	UNIT	MM	. XXX	± 1.0°	. XXX	± 0.05