





X (19~34 Pin : 5.7)
(35~60 Pin : 6.3)

NOTE(注):


1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$. (10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm. (载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS. (所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: BLACK CONDUCTIVE POLYSTYRENE. (载带材料: 黑色导电聚苯乙烯.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 13 METERS. (每卷包装长度: 13米.)
7. COMPONENT LOAD PER REEL: 1500 PCS. (每卷包装数量: 1500只.)
8. FOR 0.5mm PITCH CONNECTOR. (0.5mm间距连接器适用.)
9. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及索尼龙填充.
10. PART NO. (零件料号):

LL05453-**CR-2-TRP

NO. OF CKT
(**代表产品PIN数.)



W	PCS/REEL	REEL/CARTON	SUM (PCS)
16	1500	15	22500
	1500	15	22500
	1500	15	22500
	1500	11	16500
	1500	11	16500
	1500	11	16500
24	1500	11	16500
	1500	11	16500
	1500	11	16500
	1500	11	16500
	1500	11	16500
	1500	11	16500

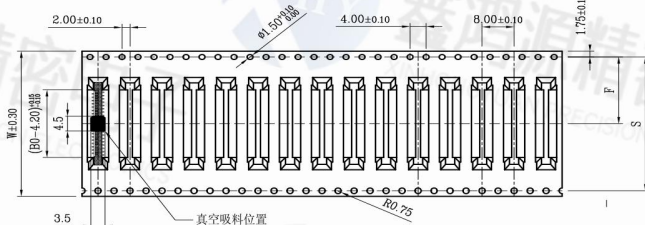

CKT (0.5mm pitch)	B0	W	F
10	10.20	24	11.4
11	10.70		
12	11.20		
13	11.70		
14	12.20		
15	12.70		
16	13.20		
17	13.70		
18	14.20		

Xihoy 深圳市鑫鸿源精密电子有限公司

Shenzhen Xinhongyuan Precision Electronics Co., Ltd.

财富热线电话: 13670232690

工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME	3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL
ANGLE PROJECTION	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	.X	±3.0°	.X	±0.20
UNIT	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0					.XX	±2.0°	.XX	±0.10
SCALE	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY	MISS. LU	UNIT	MM	.XXX	±1.0°	.XXX	±0.05