

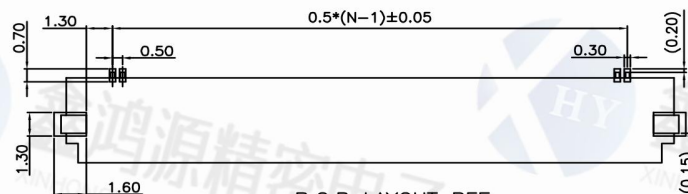
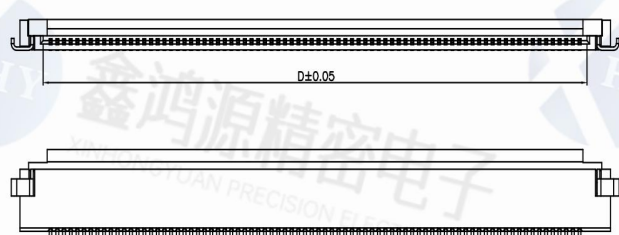



XX0518-xxCL-GF
 GF:GOLD FLASH
 SN:TIN OVER NICKEL
 NO.OF CONTACTS:(60Pin~80Pin)

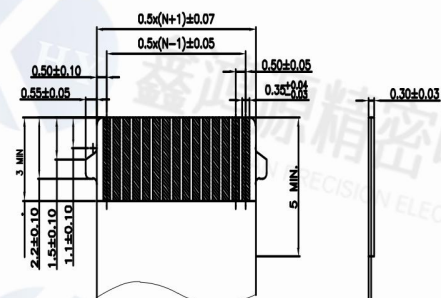



P.C.B LAYOUT REF

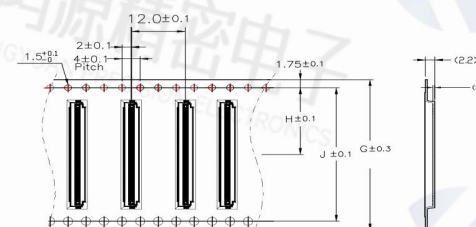

RECOMMENDED FFC DIM

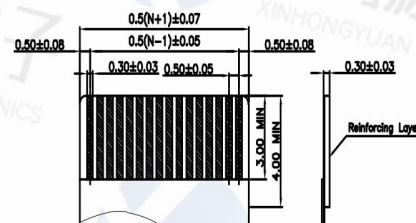

RECOMMENDED FFC DIM

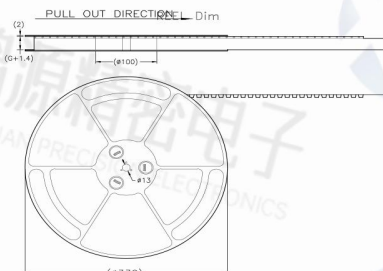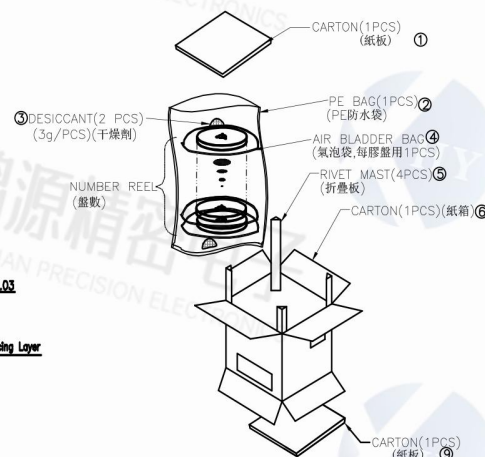

- 1.PER REEL : **1500** pcs.
- 2.Material : Black Conductive Polystyrene Alloy.
- 3.Thickness : 0.3 ± 0.05 mm.
- 4.All dimensions meet EIA-481-C requirements.

No. of Contacts	DIM.			REEL/CARTON		SUM(Pcs)
	G	H	J			
60P~80P	56	26.2	52.4	5	10000	

No. of Contacts	DIM.			
	A	B	C	D
60	34.10	29.50	32.30	30.60
64	36.10	31.50	34.30	32.60
65	36.60	32.00	34.80	33.10
66	37.10	32.50	35.30	33.60
68	37.10	33.50	35.80	34.10
80	44.10	39.50	42.30	40.60

 **深圳市鑫鸿源精密电子有限公司**
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	XX0518-**XL-GF			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY MR. ZHANG	DATE: 2016. 06. 08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
				3	TERMINAL	PHOSPHOR BRONZE		POSITIONS			ANG	TOL	DM1	TOL
PART NAME	0.5 Pitch掀盖下接H1.8带扣			2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY MR. WANG	SCALE 1/1	. X	± 3.0°	. X	± 0.2
ANGLE PROJECTION		UNIT	mm	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0			. XX	± 2.0°	. XX	± 0.1
		SCALE	1:1	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY MISS. LU	UNIT MM	. XXX	± 1.0°	. XXX	± 0.0