
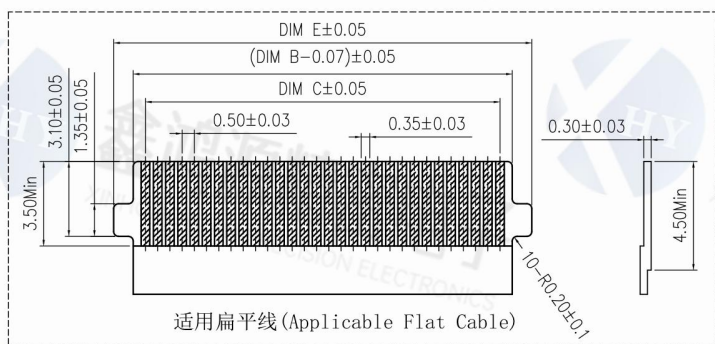
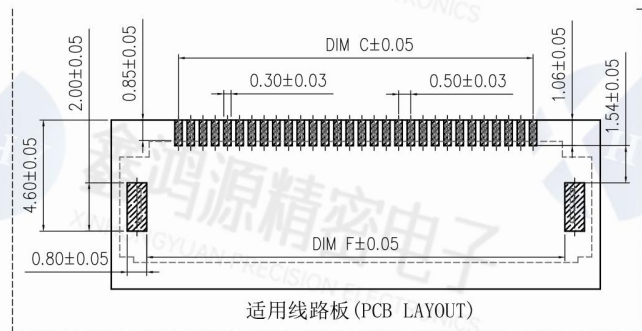
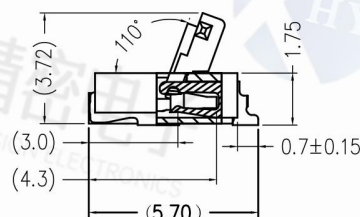
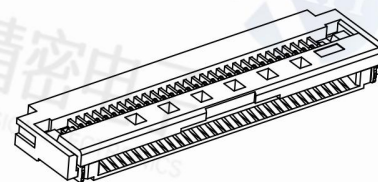
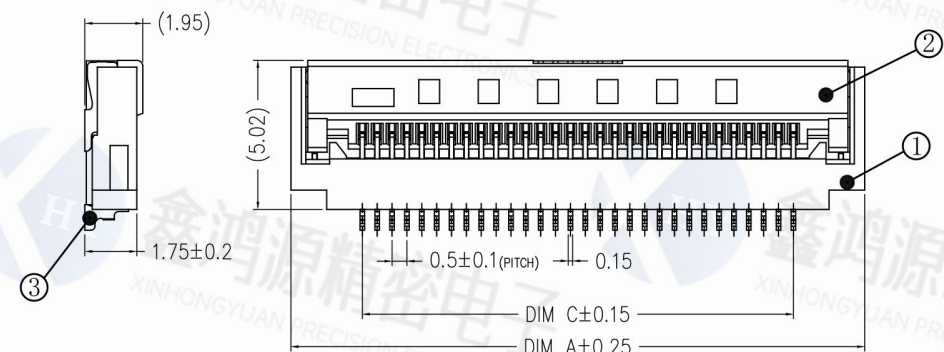


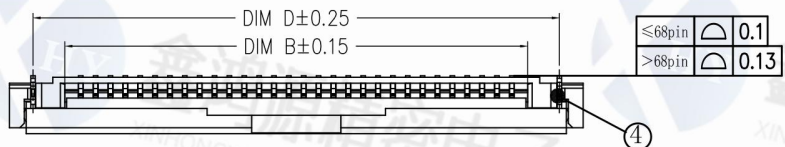

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$.
3. 额定电流: 0.5A
4. 额定电压: 50V, AC.
5. 接触电阻: $50\text{m}\Omega$ MAX.
6. 绝缘电阻: $500\text{M}\Omega$ Min.
7. 耐电压: 150V AC/1Minute
8. 产品料号:

XXK05200-**-***

NO OF CKT (产品PIN数)

流水码

Plating (电镀方式)

Packing (包装方式)

R: TAPE & REEL 卷装

0: 端子全雾锡

1: 端子全金 (G/F OVERALL)

2: 端子点镀金

3: 端子全亮锡

4: 端子半金锡

9: 未镀 (None)

序号	品名	材质
①	0.5掀盖卧式带扣芯 (H=2.0)	LCP UL94V-0 本色
②	0.5掀盖卧式带扣后盖 (H=2.0)	
③	0.5掀盖卧式带扣端子 (H=2.0)	铜合金/表面镀金
④	0.5掀盖卧式带扣焊片 (H=2.0)	铜合金/表面镀锡

Xihoy 深圳市鑫鸿源精密电子有限公司

Shenzhen Xinhongyuan Precision Electronics Co., Ltd.

财富热线电话: 13670232690

工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	XXK0520-** * *			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME	0.5 Pitch掀盖卧式下接带扣(H=2.0)			3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL
	ANGLE PROJECTION	UNIT	mm	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	. X	± 3.0°	. X	±0.20
				1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0					. XX	± 2.0°	. XX	±0.10
				NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY	MISS. LU	UNIT	MM	. XXX	± 1.0°	. XXX	±0.05