

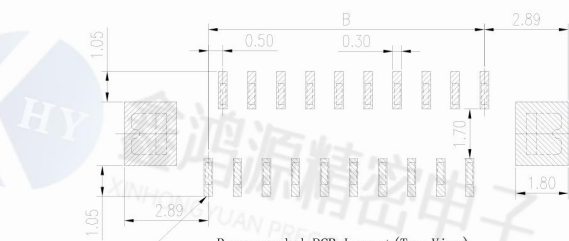
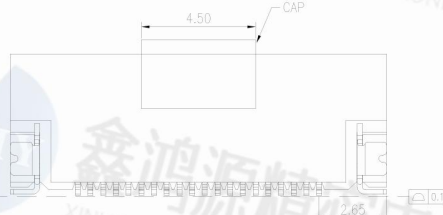
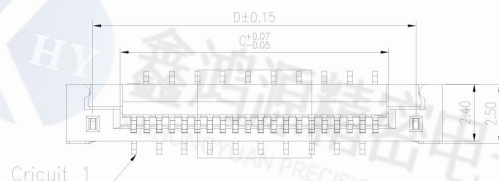


NOTES:

- 1.HOUSING: LCP/HIGH-TEMP.THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.ACTUATOR: LCP/HIGH-TEMP.THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 3.TERMINAL:PHOSPHOR BRONZE
PLATING:CONTACT AREA AND SOLDER TAIL AREA GOLD PLATING1μMIN.
OR 100~150μTIN(LEAD FREE)OVERALL 50~100μNICKEL UNDER PLATED.
- 4.FITTING NAIL:BRASS
PLATING:100~150μTIN(LEAD FREE)
OVERALL 50~100μNICKEL UNDER PLATED.
- 5.RATING:
OPERATING VOLTAGE:50V AC/DC
CURRENT RATING:0.5A AC/DC
OPERATING TEMPERATURE:-25℃~+85℃

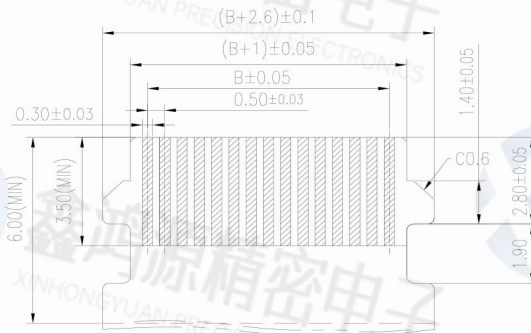

Recommended PCB Layout (Top View)
Recommended metal mask pattern (Thickness 0.1mm)

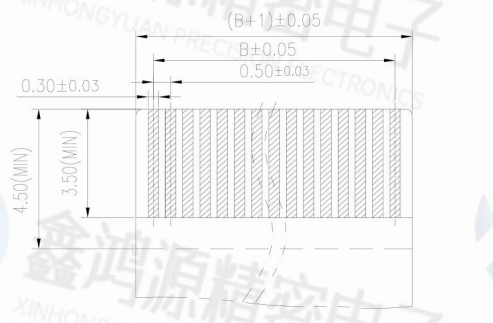

APPLICABLE FPC/FFC
(THICKNESS 0.3±0.03)

No. of contacts	Dimensions				No. of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	6.80	1.50	2.57	4.72	33	21.30	16.00	17.07	19.22
5	7.30	2.00	3.07	5.22	34	21.80	16.50	17.57	19.72
6	7.80	2.50	3.57	5.72	35	22.30	17.00	18.07	20.22
7	8.30	3.00	4.07	6.22	36	22.80	17.50	18.57	20.72
8	8.80	3.50	4.57	6.72	37	23.30	18.00	19.07	21.22
9	9.30	4.00	5.07	7.22	38	23.80	18.50	19.57	21.72
10	9.80	4.50	5.57	7.72	39	24.30	19.00	20.07	22.22
11	10.30	5.00	6.07	8.22	40	24.80	19.50	20.57	22.72
12	10.80	5.50	6.57	8.72	41	25.30	20.00	21.07	23.22
13	11.30	6.00	7.07	9.22	42	25.80	20.50	21.57	23.72
14	11.80	6.50	7.57	9.72	43	26.30	21.00	22.07	24.22
15	12.30	7.00	8.07	10.22	44	26.80	21.50	22.57	24.72
16	12.80	7.50	8.57	10.72	45	27.30	22.00	23.07	25.22
17	13.30	8.00	9.07	11.22	46	27.80	22.50	23.57	25.72
18	13.80	8.50	9.57	11.72	47	28.30	23.00	24.07	26.22
19	14.30	9.00	10.07	12.22	48	28.80	23.50	24.57	26.72
20	14.80	9.50	10.57	12.72	49	29.30	24.00	25.07	27.22
21	15.30	10.00	11.07	13.22	50	29.80	24.50	25.57	27.72
22	15.80	10.50	11.57	13.72	51	30.30	25.00	26.07	28.22
23	16.30	11.00	12.07	14.22	52	30.80	25.50	26.57	28.72
24	16.80	11.50	12.57	14.72	53	31.30	26.00	27.07	29.22
25	17.30	12.00	13.07	15.22	54	31.80	26.50	27.57	29.72
26	17.80	12.50	13.57	15.72	55	32.30	27.00	28.07	30.22
27	18.30	13.00	14.07	16.22	56	32.80	27.50	28.57	30.72
28	18.80	13.50	14.57	16.72	57	33.30	28.00	29.07	31.22
29	19.30	14.00	15.07	17.22	58	33.80	28.50	29.57	31.72
30	19.80	14.50	15.57	17.72	59	34.30	29.00	30.07	32.22
31	20.30	15.00	16.07	18.22	60	34.80	29.50	30.57	32.72
32	20.80	15.50	16.57	18.72	61	35.30	30.00	31.07	33.22

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	LX0559-**CL-GF			4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE				
PART NAME	0.5Pitch 5.9H 立贴翻盖			3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL	
ANGLE PROJECTION		UNIT		mm	2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	. X	± 3.0°	. X	± 0.20
		SCALE		1:1	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0					. XX	± 2.0°	. XX	± 0.10
					NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY	MISS. LU	UNIT	MM	. XXX	± 1.0°	. XXX	± 0.05