

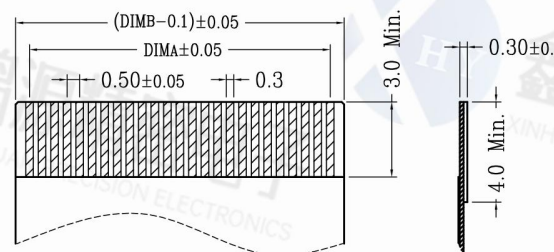


SECTION A-A

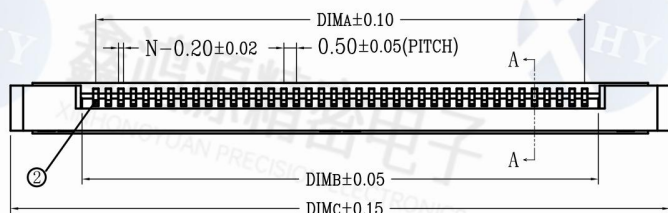

适用扁平线(Applicable Flat Cable)

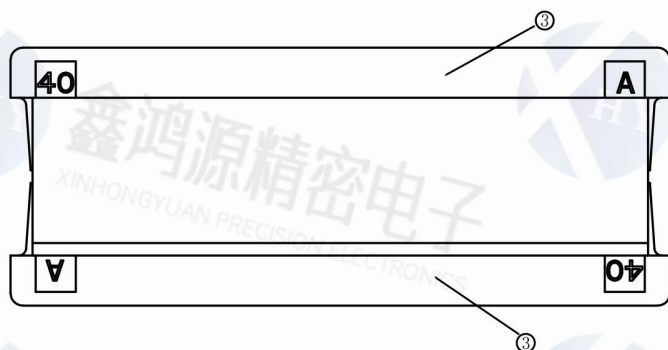

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
2. 温度范围(Temperature range): $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
3. 额定电压(Rated voltage): 50V, AC/DC(等效).
4. 接触电阻(Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻(Insulation resistance): $\geq 500M\Omega$
6. 产品料号(Product material No.):



SL0520 —** * *—**

NO OF CKT (产品PIN数)

Plating (电镀方式)

1: 端子全金 (G/F OVERALL)
4: 端子全亮锡


(Terminal all bright tin)

- Packing (包装方式)

P: PE袋装 (Bag package)

CKT	DIM A	DIM B	DIM C	CKT	DIM A	DIM B	DIM C
4	1.50	2.56	8.30	33	16.00	17.06	22.80
5	2.00	3.06	8.80	34	16.50	17.56	23.30
6	2.50	3.56	9.30	35	17.00	18.06	23.80
7	3.00	4.06	9.80	36	17.50	18.56	24.30
8	3.50	4.56	10.30	37	18.00	19.06	24.80
9	4.00	5.06	10.80	38	18.50	19.56	25.30
10	4.50	5.56	11.30	39	19.00	20.06	25.80
11	5.00	6.06	11.80	40	19.50	20.56	26.30
12	5.50	6.56	12.30	41	20.00	21.06	26.80
13	6.00	7.06	12.80	42	20.50	21.56	27.30
14	6.50	7.56	13.30	43	21.00	22.06	27.80
15	7.00	8.06	13.80	44	21.50	22.56	28.30
16	7.50	8.56	14.30	45	22.00	23.06	28.80
17	8.00	9.06	14.80	46	22.50	23.56	29.30
18	8.50	9.56	15.30	47	23.00	24.06	29.80
19	9.00	10.06	15.80	48	23.50	24.56	30.30
20	9.50	10.56	16.30	49	24.00	25.06	30.80
21	10.00	11.06	16.80	50	24.50	25.56	31.30
22	10.50	11.56	17.30	51	25.00	26.06	31.80
23	11.00	12.06	17.80	52	25.50	26.56	32.30
24	11.50	12.56	18.30	53	26.00	27.06	32.80
25	12.00	13.06	18.80	54	26.50	27.56	33.30
26	12.50	13.56	19.30	55	27.00	28.06	33.80
27	13.00	14.06	19.80	56	27.50	28.56	34.30
28	13.50	14.56	20.30	57	28.00	29.06	34.80
29	14.00	15.06	20.80	58	28.50	29.56	35.30
30	14.50	15.56	21.30	59	29.00	30.06	35.80
31	15.00	16.06	21.80	60	29.50	30.56	36.30
32	15.50	16.56	22.30				

工厂地址：深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO.	SL0520-****-**			4	STATOR	PHOSPHOR BRONZE	2	DAR. BY MR. ZHANG	DATE: 2016. 06. 08	UNLESS OTHERWISE SPECIFIED TOLERANCE				
				3	TERMINAL	PHOSPHOR BRONZE				POSITIONS	ANG	TOL	DMI	TOL
PART NAME	0.5mm拉拔双面接H2.0			2	COVER	THERMCPLASTIC UL94V-0	BLACK	2	CHK. BY MR. WANG	SCALE 1/1	. X	±3. 0°	. X	±0. 20
ANGLE PROJECTION		UNIT	mm	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	1			. XX	±2. 0°	. XX	±0. 10
		SCALE	1:1	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY MISS. LU	UNIT MM	. XXX	±1. 0°	. XXX	±0. 08