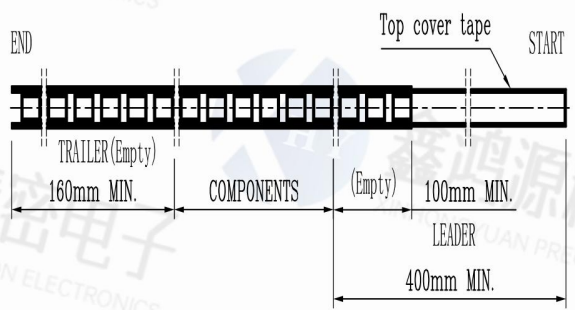
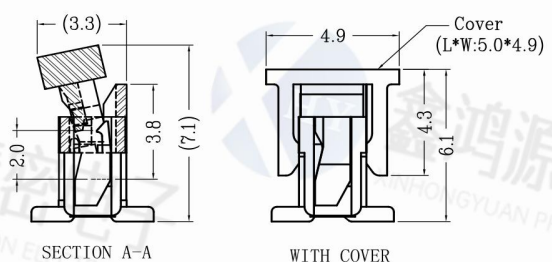
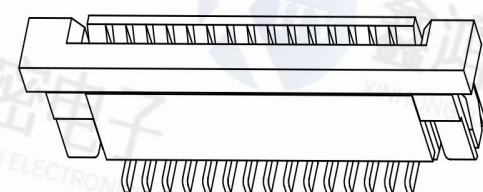
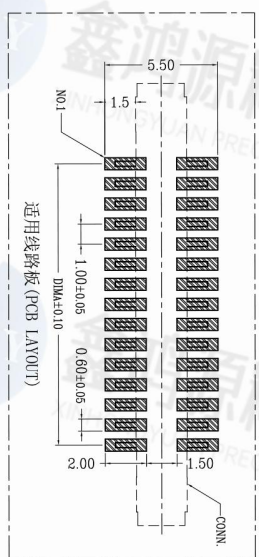
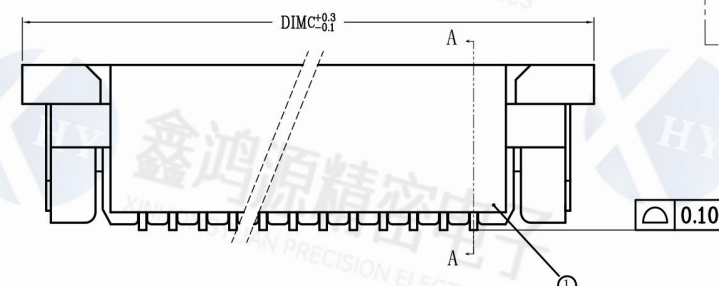
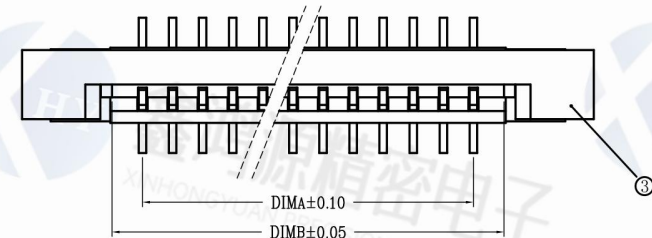
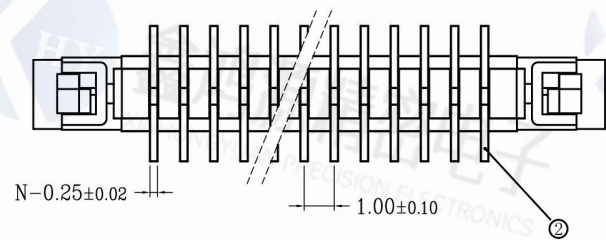


技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C。
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻: ≤0.03Ω。
5. 绝缘电阻: ≥500MΩ。
6. 产品料号:
LT1055-***
NO OF CKT (产品PIN数)
Plating (电镀方式)
0: 端子全镀锡
1: 端子全金 (G/F OVERALL)
4: 端子全亮锡
Packing (包装方式)
T: TUBE管装
R: TAPE & REEL卷装
M: TAPE & REEL WITH MYLAR贴MYLAR卷装
N: TUBE & WITH MYLAR贴MYLAR管装
C: TAPE & REEL WITH COVER加盖卷装

适用扁平线 (Applicable Flat Cable)

版次	变更摘要	日期	序号	品名	材质
1	增加料号说明	2015/1/28	①	1.0 K型胶芯 (H2.5)	LCP UL94V-0 本色
			②	1.0 K型立贴端子 (H5.5)	铜合金/表面镀锡
			③	1.0 K型卧式后盖 (H2.5)	LCP UL94V-0 黑色

一般公差 (TOLERANCE)
X ±.50 XX ±.10
X ±.20 XXX ±.05
ANGLES ±1°

CKT	DIMA	DIMB	DIMC
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	LT1055-***	4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME	1.0mm Pitch 立式带锁一字型无焊盘	3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL
ANGLE PROJECTION		2	COVER	THERMOPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	.X	±3.0°	.X	±0.20
UNIT	mm	1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL	0					.XX	±2.0°	.XX	±0.10
SCALE	1:1	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY	MISS. LU	UNIT	MM	.XXX	±1.0°	.XXX	±0.05