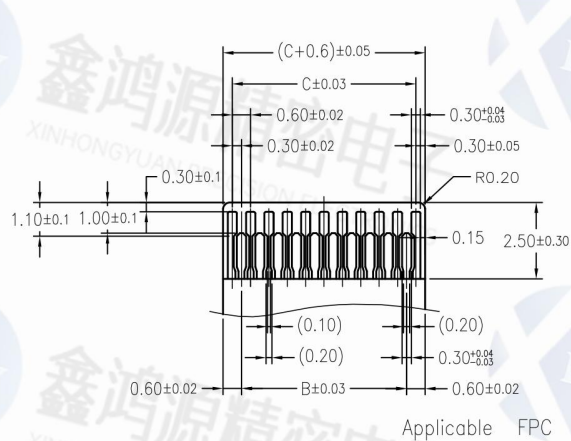
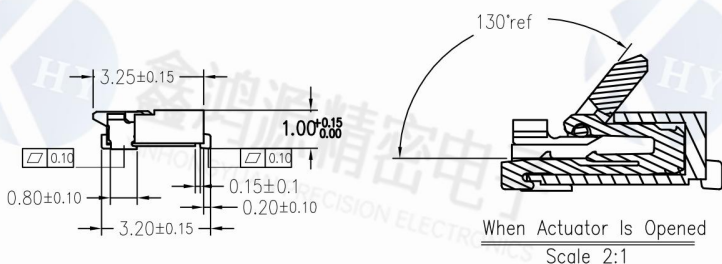
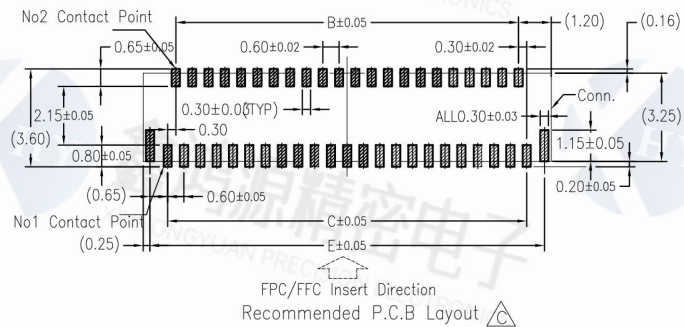
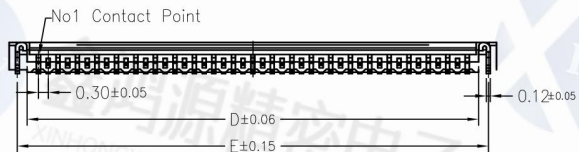
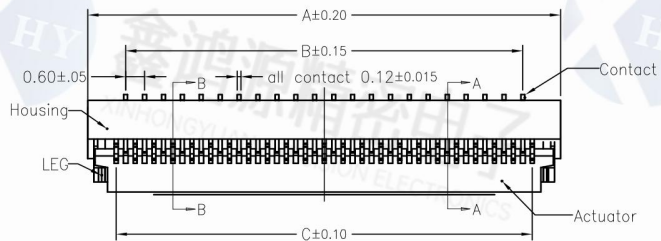


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$ 。
3. 接触电阻: $\leq 40\text{m}\Omega$ (DC20mV最大电压/10mA最大电流)。
4. 额定电压: 30V AC。
5. 额定电流: 0.2A DC。
6. 绝缘电阻: $\geq 50\text{M}\Omega$ (DC500V)。
7. 产品料号:

XX0310—** * *—***

NO OF CKT (产品PIN数)

Plating (电镀方式)

- 1: 端子全金 (G/F OVERALL)
- 2: 端子点镀金

流水码

Packing (包装方式)

- T: TUBE 管装
R: TAPE & REEL 卷装

Number of Contacts	Dimension				
	A	B	C	D	E
13	5.40	3.00	3.60	4.25	4.90
15	6.00	3.60	4.20	4.85	5.50
17	6.60	4.20	4.80	5.45	6.10
19	7.20	4.80	5.40	6.05	6.70
21	7.80	5.40	6.00	6.65	7.30
23	8.40	6.00	6.60	7.25	7.90
25	9.00	6.60	7.20	7.85	8.50
27	9.60	7.20	7.80	8.45	9.10
29	10.20	7.80	8.40	9.05	9.70
31	10.80	8.40	9.00	9.65	10.30
33	11.40	9.00	9.60	10.25	10.90
35	12.00	9.60	10.20	10.85	11.50
37	12.60	10.20	10.80	11.45	12.10
39	13.20	10.80	11.40	12.05	12.70
41	13.80	11.40	12.00	12.65	13.30
45	15.00	12.60	13.20	13.85	14.50
49	16.20	13.80	14.40	15.05	15.70
51	16.80	14.40	15.00	15.65	16.30
57	18.60	16.20	16.80	17.45	18.10
61	19.80	17.40	18.00	18.65	19.30
67	21.60	19.20	19.80	20.45	21.10
71	22.80	20.40	21.00	21.65	22.30
73	23.40	21.00	21.60	22.25	22.90

Xihoy 深圳市鑫鸿源精密电子有限公司
Shenzhen Xinhongyuan Precision Electronics Co., Ltd.
财富热线电话: 13670232690
工厂地址: 深圳市宝安区新桥街道象山社区132号17栋7楼

PART NO	XX0310—** * *—***	4	STATOR	PHOSPHOR BRONZE		0	DAR. BY	MR. ZHANG	DATE:	2016.06.08	UNLESS OTHERWISE SPECIFIED TOLERANCE			
PART NAME	0.3mm Pitch 前掀式下接H1.0	3	TERMINAL	PHOSPHOR BRONZE		POSITIONS					ANG	TOL	DMI	TOL
ANGLE PROJECTION		2	COVER	THERMCPLASTIC UL94V-0	BLACK	1	CHK. BY	MR. WANG	SCALE	1/1	. X	± 3.0°	. X	± 0.20
UNIT	mm	1	HOUSING	THERMCPLASTIC UL94V-0	NATURAL	0					. XX	± 2.0°	. XX	± 0.10
SCALE	1:1	NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY	APP. BY	MISS. LU	UNIT	MM	. XXX	± 1.0°	. XXX	± 0.05